


# vinyl planks & tiles.



BERRY  ALLOC

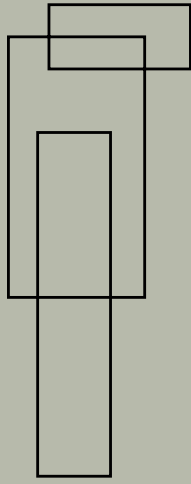

/ zenn.  
Collection  
overview.

# Technical collection overview.









## / zenn.

Technical	ZENN 30		ZENN 55		ZENN 55 Herringbone	
	Rigid click with integrated underlay	Glue down	Rigid click with integrated underlay	Glue down	Rigid click with integrated underlay	Glue down
Wearlayer (mm)	0,30 mm		0,55 mm			
Embossing	Wood & stone emboss		Wood & stone emboss		Wood emboss	
Thickness (mm)	4 + 1	2	5 + 1	2,5	5 + 1	2,5
Integrated underlay	✓	No	✓	No	✓	No
Lock	<b>2G</b>	No	<b>5G</b>	No	<b>5G</b>	No
Class	23/32	23/31	23/33	23/33/42	23/33	23/33/42
Commercial warranty	5 years		3 years		10 years	
Residential warranty	20 years		15 years		Lifetime	

Test results	ZENN 30		ZENN 55		ZENN 55 Herringbone	
	suitable max. 27° (80°F) / electrical floor heating systems: max 60 W/m <sup>2</sup>		suitable max. 27° (80°F) / electrical floor heating systems: max 60 W/m <sup>2</sup>		suitable max. 27° (80°F) / electrical floor heating systems: max 60 W/m <sup>2</sup>	
Underfloor heating	pass		pass		pass	
Castor chair	Bfl-s1		Bfl-s1		Bfl-s1	
Fire resistance	> 6		> 6		> 6	
Light fastness	OK		OK		OK	
Chemical resistance	< 0,1 mm		< 0,1 mm		< 0,1 mm	
Residual indentation	0,025 m <sup>2</sup> K/W	0,010 m <sup>2</sup> K/W	0,030 m <sup>2</sup> K/W	0,010 m <sup>2</sup> K/W	0,030 m <sup>2</sup> K/W	0,010 m <sup>2</sup> K/W
Thermal resistance	R10		R10		R10	
Slip resistance	class DS		class DS		class DS	
Sound reduction: impact sound	19 dB	2dB	19 dB	2dB	19 dB	2dB
Dimensional stability	< 0,15 % - pass		< 0,15 % - pass		< 0,15 % - pass	
Lock Strength	> 1,5 kN/m - pass	/	> 1,5 kN/m - pass	/	> 1,5 kN/m - pass	/



Planks & herringbone	ZENN 30		ZENN 55		ZENN 55 Herringbone	
	Planks m <sup>2</sup> per pack	2,17 m <sup>2</sup>	5,20 m <sup>2</sup>	1,73 m <sup>2</sup>	4,34 m <sup>2</sup>	1,97 m <sup>2</sup>
Planks per pack	10 pieces	24 pieces	8 pieces	20 pieces	30 pieces	64 pieces
m <sup>2</sup> per pallet	97,55 m <sup>2</sup>	234,11 m <sup>2</sup>	78,04 m <sup>2</sup>	195,09 m <sup>2</sup>	78,96 m <sup>2</sup>	187,29 m <sup>2</sup>
Dimensions	L 1219,2 x W 177,8 mm		L 1219,2 x W 177,8 mm		L 609,6 x W 107,95 mm	L 609,6 x W 114,3 mm

Tiles	ZENN 30		ZENN 55	
	Tiles m <sup>2</sup> per pack	2,51 m <sup>2</sup>	5,02 m <sup>2</sup>	1,67 m <sup>2</sup>
Tiles per pack	6 pieces	12 pieces	4 pieces	10 pieces
m <sup>2</sup> per pallet	100,33 m <sup>2</sup>	230,77 m <sup>2</sup>	83,61 m <sup>2</sup>	192,31 m <sup>2</sup>
Dimensions	L 914,4 x W 457,2 mm		L 914,4 x W 457,2 mm	

		ZENN 30		ZENN 55		ZENN 55 Herringbone	
		Rigid click with integrated underlay	Glue down	Rigid click with integrated underlay	Glue down	Rigid click with integrated underlay	Glue down
	Sorrento	60002205	60002217	60002230	60002250	60002242	60002262
	Monsanto	60002206	60002218	60002231	60002251	60002243	60002263
	Orlando	60002207	60002219	60002232	60002252	60002244	60002264
	Oslo	60002208	60002220	60002233	60002253	60002245	60002265
	Palermo	60002209	60002221	60002234	60002254	60002246	60002266
	Porto	60002210	60002222	60002235	60002255	60002247	60002267
	Caïro	60002211	60002223	60002236	60002256	60002248	60002268
	Faro	60002212	60002224	60002237	60002257	60002249	60002269

	Delhi	60002213	60002225	60002238	60002258
	Bali	60002214	60002226	60002239	60002259
	Rimini	60002215	60002227	60002240	60002260
	Fuji	60002216	60002228	60002241	60002261

Don't forget about our matching accessories to finish your floor.

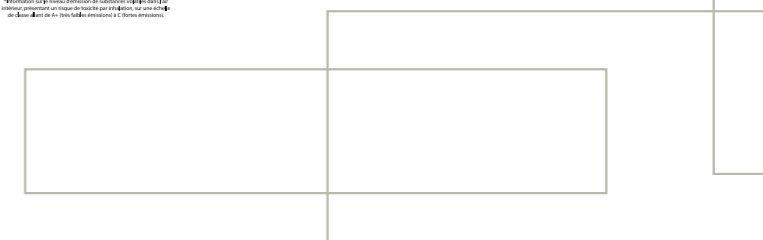



**BerryAlloc**

Industrielaan 100  
8930 Menen, Belgium  
T +32 56 67 66 11  
info@berryalloc.com

**[www.berryalloc.com](http://www.berryalloc.com)**